

# **SPEAKMAN®**

*Absolutely the best.*

COMMERCIAL & INDUSTRIAL

## EMERGENCY SHOWERS & EYEWASHES



## SELF CONTAINED UNITS

### SE-4300/SE-4350

The SE-4300 portable, gravity operated eyewash is the next best thing to a plumbed eyewash. The 20 gallon capacity provides a run time in excess of the ANSI Z358.1 required 15 minutes and offers the best performing spray. A simple pull of an elastomeric strap activates the unit and provides hands free operation. The integral drain allows flushing fluids to be contained avoiding slip hazards. The SE-4300 is the industry's only portable eyewash that offers an optional side fitting drench hose. The optional SE-4920 drench hose attaches easily to the side discharge port and provides the ability for spot body flushing. SE-4320 eyewash including SE-4920 side fitting drench hose. SE-4350 includes freeze protection heating component



## EYESAVER® FAUCETS

### SEF-9000

Combination Speakman eyewash/drench hose and a Speakman service sink faucet. The eyewash is attached directly to the faucet's cold water integral stop cavity and permits both units to be operated independently. As a result only one plumbing connection is required and there is never a worry about delivering scalding water to the eyes. The unique design is equally beneficial for new installations as well as retrofits.



### SEF-1800

Eyesaver® faucet introduces a revolutionary concept in laboratory emergency equipment. Unique design combines a fully functional faucet with an independently operated eyewash. The faucet features a 1/4 turn Speakman ceramic valve while the eyewash offers twin aerated sprays with automatic flow control and flip top dust covers. Activation of the eyewash automatically aligns the eyewash toward the user. Units are certified to meet ANSI Z358.1, ASME A112.18.1/CSA B125.1, including NSF 61, Sec 9. The SEF-1000, SEF-1800, and SEF-1800-SL are also available in lead free brass to meet CA AB 1953 and VT ACT 193 standards.




SEF-1814  
Sensor activated faucet with above counter mixer.



SEF-1800-SL  
Single lever activated faucet.

## LABORATORY UNITS

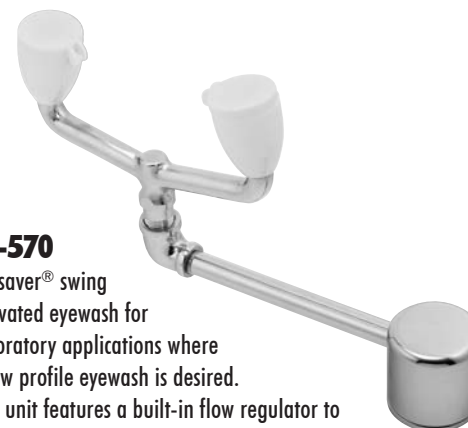

### SE-570

Eyesaver® swing activated eyewash for laboratory applications where a low profile eyewash is desired. The unit features a built-in flow regulator to compensate for varying supply pressures and aerated sprays that offer gentle yet thorough cleaning action.



## THERMOSTATIC MIXING VALVES

Thermostatic mixing valve for safety showers and eyewashes provides a safe and plentiful supply of tempered water when used in conjunction with a potable hot water source. Features an automatic hot water shutoff to protect against cold water supply failure along with a cold-water bypass that provides full cold-water flow in the event of element failure.

- SE-350 67 gpm with 43 gpm bypass
- SE-362 36 gpm with 20 gpm bypass
- SE-370 7 gpm with 5 gpm bypass

### SE-575-DP

Wall mounted laboratory emergency eyewashes with dual sprays offers the ultimate in emergency protection. These units are activated by simply pulling the spray arms toward the user. Integral pan collects flushing fluid.



### SE-920

Wall mounted drench hose featuring self-closing valve, aerated spray outlet, 6' hose and flip top dust cover.



### SE-927

Counter top mounted combination drench hose/eyewash featuring stay open valve, twin aerated sprays with automatic flow control, 6' hose and flip top dust covers. Meets the eyewash requirement for ANSI 358.1.

## EYESAVER® EYEWASH AND EYE/FACE WASH STATIONS

### SE-400

Eye/face wash provides six aerated sprays for gentle yet thorough rinsing of the eyes and face and features a large rectangular stainless steel bowl, stay open ball valve and an in-line strainer.



### SE-490

Eye/face wash features a stainless steel bowl, dual spray heads with automatic flow controls and flip top dust covers.



### SE-495

Eye/face wash features a plastic bowl, dual spray heads with automatic flow controls and flip top dust covers.

### SE-505

Eyewash station offers twin aerated sprays for gentle yet thorough rinsing of the eyes and face. The unit features a rectangular stainless steel bowl and unique panic bar activating system.



### SE-580

Eyewash features a plastic bowl, dual aerated spray heads with automatic flow controls and flip top dust covers.



### SE-582

Eyewash features a stainless steel bowl, dual aerated spray heads with automatic flow controls and flip top dust covers.



## EYESAVER® EYEWASH AND EYE/FACE WASH STATIONS

## SAFE-T-ZONE® COMBINATION UNITS



### SE-603

Features the SE-400 eye/face wash with six aerated sprays and rectangular stainless steel bowl combined on a painted galvanized steel stanchion with an impeller action deluge showerhead which is activated by high visibility yellow pull rod.



### SE-625

Features the SE-490 eye/face wash with dual spray outlets, flip top dust covers and stainless steel bowl combined on a stainless steel stanchion with an impeller action deluge showerhead which is activated by a stainless steel pull rod.


### SE-7000

Freeze protected combination shower and eye/face wash units are wrapped with heat trace cable, insulation and are jacketed in PVC to protect them to -50°F. The eye/face wash features dual spray outlets with automatic flow controls and flip top dust covers. The impeller action shower is activated by a high visibility yellow pull rod. Units meeting the CID2 and CID1 electrical requirements are available. (Shown with optional area light, pilot light, drench hose and thermometer.)



### SE-690/695

SE-690 features the SE-490 eye/face wash (previous page) combined on a painted galvanized steel stanchion with an impeller action deluge showerhead activated by a high visibility yellow pull rod. SE-695 features SE-495 eye/face wash.

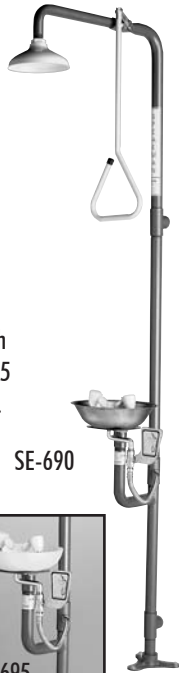

### SE-693/697

SE-693 features the SE-580 eyewash combined on a painted galvanized steel stanchion with an impeller action deluge showerhead activated by a high visibility yellow pull rod. SE-697 features SE-582 eyewash.



## ALARMS

### AL-3

Alarm system with flow switch-light and horn. Blinking light and horn are activated by a flow switch. Explosion-proof models available.



# SPEAKMAN®

*Absolutely the best.*

COMMERCIAL & INDUSTRIAL

## LIFESAVER® DELUGE SHOWERS

### SE-238

Emergency deluge shower with extendable 8" showerhead for ceilings over 8'. Fully recessed wall cabinet. Minimum wall thickness 6".




### SE-237

Emergency 10" dia. deluge shower with flanged and fully recessed wall cabinet. Minimum wall thickness 6".




### SE-227

Shower features an impeller action yellow Cylolac® showerhead with a horizontal supply. The unit is activated with a 1" stay-open ball valve operated by a high visibility yellow pull rod. SE-220 Features vertical supply.

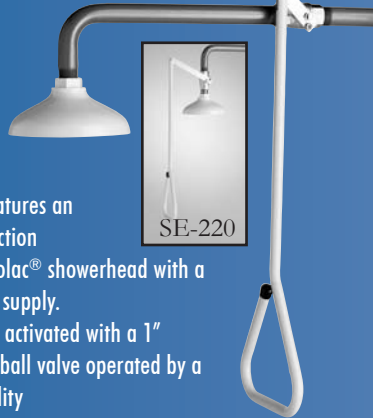

### SE-236-PR

Shower features a concealed ceiling mounted impeller action chrome plated showerhead with a horizontal supply. The unit is activated with a 1" stay-open ball valve operated by a high visibility yellow pull rod.

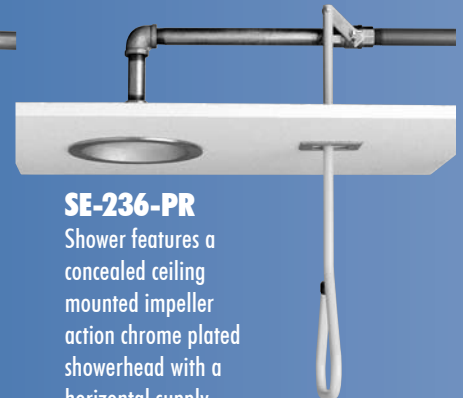

Reduce ♻️ Reuse ♻️ Recycle ♻️ 1016-11