

SPEAKMAN®

Absolutely the best.

COMMERCIAL & INDUSTRIAL

LABORATORY PRODUCTS

SEF-1800

The Eyesaver® faucet introduces a revolutionary concept in laboratory emergency equipment. This unique design combines a fully functional faucet with an independently operated eyewash. The faucet features a ¼ turn ceramic valve while the eyewash offers twin aerated sprays with automatic flow control and flip top dust covers. Activation of the eyewash automatically aims the eyewash toward the user. The SEF-1800 is available in lead free brass to meet CA AB 1953 & VT 193 standards.



SC-7124


Dual handle lab faucet with ¼ turn ceramic cartridges and wrist blade handles. Rigid or swivel gooseneck spout.

SAFETY

FAUCETS

SE-573

Back deck sink mounted emergency eye/face wash. The unit is activated by pulling eye/face wash downward, over the sink, to open position. To shut off the unit push the eye/face wash upward to the vertical off position. The unit is supplied with plastic spray heads, with individual flow restrictors, and dust covers.

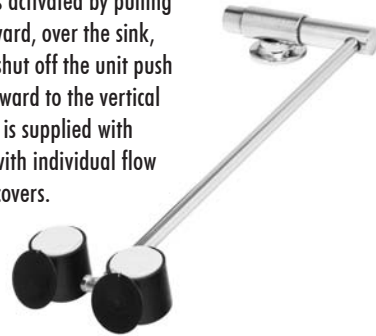

SE-575-DP

Wall mounted laboratory emergency eyewashes with dual sprays offers the ultimate in emergency protection. These units are activated by simply pulling the spray arms toward the user. Integral pan collects flushing fluid.




SE-572

Counter-top mounted eyewash with twin aerated sprays and automatic flow control. Unit swivels 90° and can be mounted on counter tops up to 1-1/4" thick.




SE-370

Thermostatic mixing valve for emergency eyewashes provides a safe and plentiful supply of tempered water when used in conjunction with a potable hot water source. The 7 GPM capacity will support most single eyewash stations and features an automatic hot water shutoff to protect against cold water supply failure along with a cold-water bypass that provides full cold-water flow in the event of element failure.

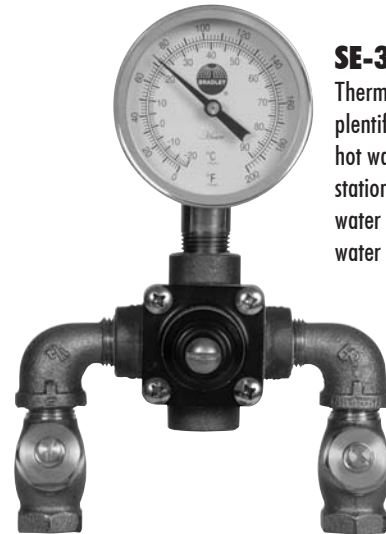

SE-570

Eyesaver® swing activated eyewash for laboratory applications where a low profile eyewash is desired. The unit features a built-in flow regulator to compensate for varying supply pressures and aerated sprays that offer gentle yet thorough cleaning action. Mounts to counter tops up to 2-1/4" thick.

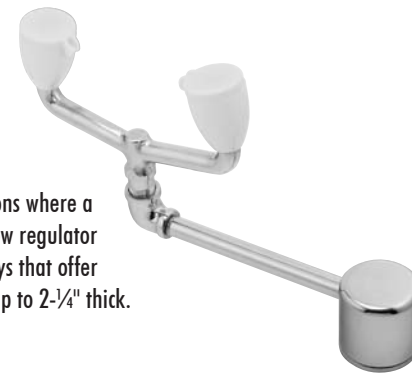

SE-927


Counter top mounted combination drench hose/eyewash featuring stay open valve, twin aerated sprays with automatic flow control, 6' hose and flip-top dust covers. Meets the eyewash requirement for ANSI 358.1.



THE SEF-1814 EYESAVER® FAUCET

combines a sensor operated gooseneck faucet with an independently operated eyewash. These faucets are either AC or DC powered and feature either manual or automatic mixing valves to adjust temperature for the faucet. The eyewash offers twin aerated sprays and flip top dust covers and is supplied with either cold or tepid water through a separate feed. Tepid water to the eyewash is provided with the optional SE-370 mixing valve.

Available models:
AC power - SEF-1824
Battery power - SEF-1814

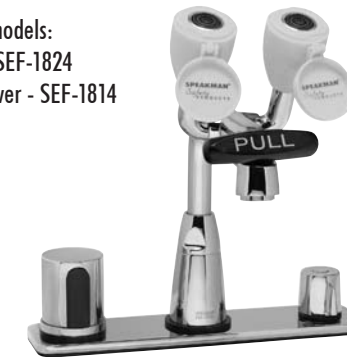

SENSORFLO GOOSENECK FAUCET

with 4" deck plate and above-counter mixer. Polished chrome plated. Above-counter hot/cold mixer with built-in check valves and adjustable temperature limit stop. Solenoid with built-in filter.

Available models:
AC power - S-9212
Battery power - S-9112



SENSORFLO® FAUCETS

These ergonomically designed electronic faucets offer the ultimate in water and energy conservation. The Sensorflo lavatory faucets can save as much as 85% of normal water usage over conventional plumbing faucets. Touch free operation prevents spread of germs and meets ADA requirements. Features highly reliable waterproof sensors and specification quality, durable plumbing modular components. Products have been styled for ease of cleaning and a sleek, contemporary look. Available in battery and AC powered, these faucets come standard with a water conserving, vandal-resistant flow control that reduces flow to 2.2 gpm/8.4 lpm to meet ANSI A112.18.1M.

BATTERY POWERED MODELS

Feature two 3-volt DC lithium batteries with waterproof connectors housed above-counter in spout for ease of maintenance and vandal resistance. Low battery warning light. Vandal-resistant time out feature.

A/C POWERED MODELS

Feature a UL/CSA approved transformer 120 VAC to 12 DC with waterproof connectors. Vandal-resistant time out feature.

Emergency Showers

SE-220

Shower features an impeller action yellow Cyclac® showerhead with a vertical overhead supply. The unit is activated with a 1" stay-open ball valve operated by a high visibility yellow pull rod.




SE-227

Shower features an impeller action yellow Cyclac showerhead with a horizontal supply. The unit is activated with a 1" stay-open ball valve operated by a high visibility yellow pull rod.




SE-236-PR

Shower features a concealed ceiling mounted impeller action chrome plated showerhead with a horizontal supply. The unit is activated with a 1" stay-open ball valve operated by a high visibility yellow pull rod.

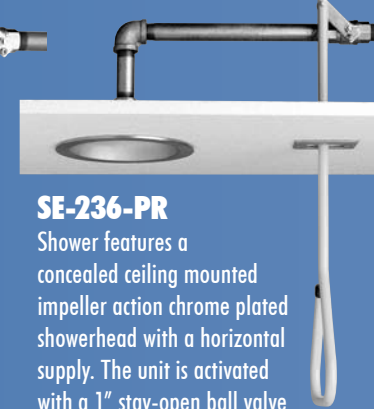

SE-237

Emergency deluge shower with 10" dia. flanged and fully recessed wall cabinet. Minimum wall thickness 6".

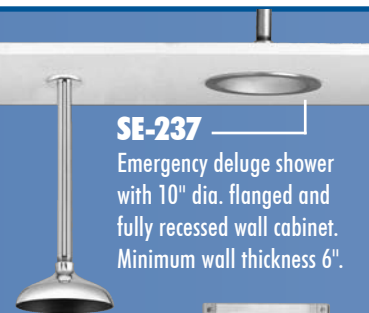

SE-238

Emergency deluge shower with extendable 8" showerhead for ceilings over 8'. Fully recessed wall cabinet. Minimum wall thickness 6".



S-3661

Polished chrome plated side mount single lever control gooseneck faucet with long life ceramic cartridge. Adjustable temperature limit and flow control. Solid brass body. Includes stainless steel braided hose connection from valve to spout. 8" deep gooseneck spout, rigid or swivel. Vandal-resistant flow control reduces flow to

2.2 gpm/8.4 lpm. Meets existing ANSI A112.18.1M and NSF61 standards.



SC-3004-LD

Polished chrome plated widespread gooseneck faucet. 1/4-turn ceramic cartridges covered by a 25-year warranty. Vandal-resistant 4" wrist blade handles with color-coded indexes. Adjustable centers from 6" to 12". Accommodates installations up to 2" thick. 5-1/4" deep spread gooseneck spout. Water conserving device reduces flow to 2.2 gpm/8.4 lpm. Meets ANSI A112.18.1M and NSF61 standards.



FAUCETS

SC-7111



Polished chrome plated single handle laboratory faucet with ¼ turn ceramic cartridges covered by a 25-year warranty. Accommodates installations up to 1-5/16" thick. Vandal-resistant four arm handle. Vandal-resistant flow control reduces flow to 2.2 gpm/8.4 lpm.

Meets ANSI A112.18.1M and NSF61 standards.

Available models:

SC-7111 Single handle faucet with 5-¼" deep gooseneck spout, rigid or swivel.

SC-7111-8 Single handle faucet with 8" deep gooseneck spout, rigid or swivel.

SC-7111-VB6-ST Single handle faucet with 6" deep rigid vacuum breaker spout and serrated tip.

SC-7111-VB8-ST Single handle faucet with 8" deep rigid vacuum breaker spout and serrated tip.

SC-7121



Polished chrome plated two handle laboratory faucet with ¼ turn ceramic cartridges covered by a 25-year warranty. Accommodates installations up to 2-¾" thick. Vandal-resistant four arm handles with color-coded indexes. Vandal-resistant flow control reduces flow to 2.2 gpm/8.4 lpm.

Meets ANSI A112.18.1M and NSF61 standards.

Available models:

SC-7121-VB6-ST Two handle faucet with 6" deep rigid vacuum breaker spout and serrated tip.

SC-7121 Two handle faucet with 5-¼" deep gooseneck spout, rigid or swivel.

SC-7121-8 Two handle faucet with 8" deep gooseneck spout, rigid or swivel.

SC-7121-SS Two handle faucet with 9" deep tubular swing spout, rigid or swivel.

SC-7121-SWVB6-ST Two handle faucet with 6" deep swivel vacuum breaker spout and serrated tip.

SC-7121-SWVB8-ST Two handle faucet with 8" deep swivel vacuum breaker spout and serrated tip.

SC-7121-VB8-ST Two handle faucet with 8" deep rigid vacuum breaker spout and serrated tip.

SC-7121-SWVB8 Two handle faucet with 8" deep swivel vacuum breaker spout.

SC-7124



Polished chrome plated two handle laboratory faucet with ¼ turn ceramic cartridges covered by a 25-year warranty. Accommodates installations up to 2-¼" thick. Vandal-resistant 4" wrist blade handles with color-coded indexes. Vandal-resistant flow control reduces flow to 2.2 gpm/8.4 lpm.

Meets ANSI A112.18.1M and NSF61 standards.

Available models:

SC-7124 Two handle faucet with 5-¼" deep gooseneck spout, rigid or swivel.

SC-7124-8 Two handle faucet with 8" deep gooseneck spout, rigid or swivel.

SC-7124-SWVB6-ST Two handle faucet with 6" deep swivel vacuum breaker spout and serrated tip.

SC-7124-SWVB8-ST Two handle faucet with 8" deep swivel vacuum breaker spout and serrated tip.

SPEAKMAN[®]

Absolutely the best.

400 ANCHOR MILL ROAD | NEW CASTLE, DE 19720

www.speakmancompany.com

PHONE: 800-537-2107 | FAX: 800-977-2747

LABORATORY SPOUT OPTIONS



8" deep spread gooseneck spout, rigid or swivel



9" tubular swing spout, rigid or swivel



6" deep vacuum breaker spout, rigid or swivel



8" deep vacuum breaker spout, rigid or swivel



Serrated Tip (vacuum breaker spouts only)